

MEGADYNE ROLLPOWER™

MEGADYNE ROLLPOWER


Megadyne Rollpower™ the new elastic rubber ribbed belt designed to outperform in roller conveyor applications.

The belt is made with EPDM compound (2-3-4 ribs) and with elastic high-strength, low-stretch polyamide cords.

The main features and benefits are related to efficiency, cost and energy-saving:

- Stable tension over time
- Smooth, reliable and quiet running
- Long belt life due to superior wear, aging and abrasion resistance
- Fast and easy installation and replacement
- Reduce line downtime
- Excellent grip
- Speed up to 3 m/s
- Fully loaded stops and starts

MEGADYNE ROLLPOWER™ IS AVAILABLE IN PJ PITCH AND FOLLOWING LENGTHS:



BELT BODY

EPDM compound; 2-3-4 ribs; other options on request.


TENSILE CORDS

Elastic high-strength, low-stretch polyamide cords.

PITCH: PJ

Cogged back only for sizes 364 mm and under.

For sizes larger than 364 mm a standard flat backing will be provided.

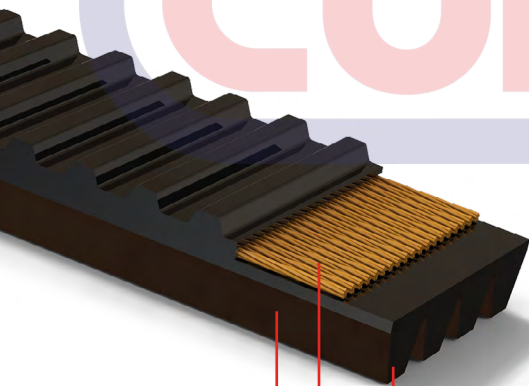

BELT BODY

TENSILE CORDS

PITCH: PJ

ROLLPOWER™ BELTS

BELT CODE	LENGTH (mm)	LENGTH (inches)
206JELRPW	205	8,07
214JELRPW	217	8,55
236JELRPW	235	9,25
246JELRPW	248	9,75
256JELRPW	260	10,24
263JELRPW	265	10,45
265JELRPW	267	10,53
270JELRPW	269	10,57
272JELRPW	269	10,59
282JELRPW	283	11,14
286JELRPW	285	11,20
290JELRPW	291	11,45
292JELRPW	294	11,59
302JELRPW	303	11,93
307JELRPW	305	12,02
314JELRPW	314	12,36
316JELRPW	320	12,60
336JELRPW	336	13,23
340JELRPW	340	13,39
346JELRPW	346	13,62
364JELRPW	364	14,33

STANDARD ELASTIC BELTS

BELT CODE	LENGTH (mm)	LENGTH (inches)
376JELRPW	376	14,82
381JELRPW	380	14,97
416JELRPW	404	15,89
432JELRPW	432	16,99
452JELRPW	452	17,81
486JELRPW	484	19,04
511JELRPW	511	20,12
518JELRPW	518	20,40
536JELRPW	538	21,19
558JELRPW	558	21,96
591JELRPW	591	23,25
609JELRPW	609	23,98
616JELRPW	616	24,23
636JELRPW	644	25,36
664JELRPW	664	26,14
682JELRPW	682	26,85
693JELRPW	693	27,30
716JELRPW	716	28,20
746JELRPW	745	29,34
759JELRPW	759	29,90

MULTI-RIB BELTS

